



SERVICE BULLETIN

Classification: EC97-051	Reference: NTB98-041	Date: May 15, 1998
-----------------------------	-------------------------	-----------------------

ALL VACUUM HOSE LUBRICANT APPLICATIONS

APPLIED VEHICLES: All Models

SERVICE INFORMATION

Some vehicles may experience a MIL "On" condition after vehicle service if non-approved lubricants are used during vacuum hose installation.

Use this bulletin to ensure that only a Nissan approved lubricant is being applied during vacuum hose installation and that the correct application procedure is followed.

SERVICE PROCEDURE

If vacuum hose installation is difficult, apply **Texaco Canopus 13 Mineral Oil** (see Parts Information table) as follows:

1. Dip a clean coffee stirrer or comparable applicator into the can of mineral oil.
NOTE: If the applicator used is hollow, ensure that oil does not get trapped inside by placing your thumb over one end before dipping the other end in the oil.
2. Gently insert the coated stirrer slightly inside the tip of the vacuum hose (see Figure 1).
NOTE: Do not exceed ¼ inch (5 mm) from the edge of the hose. Excessive oil can also result in a MIL "On" incident.

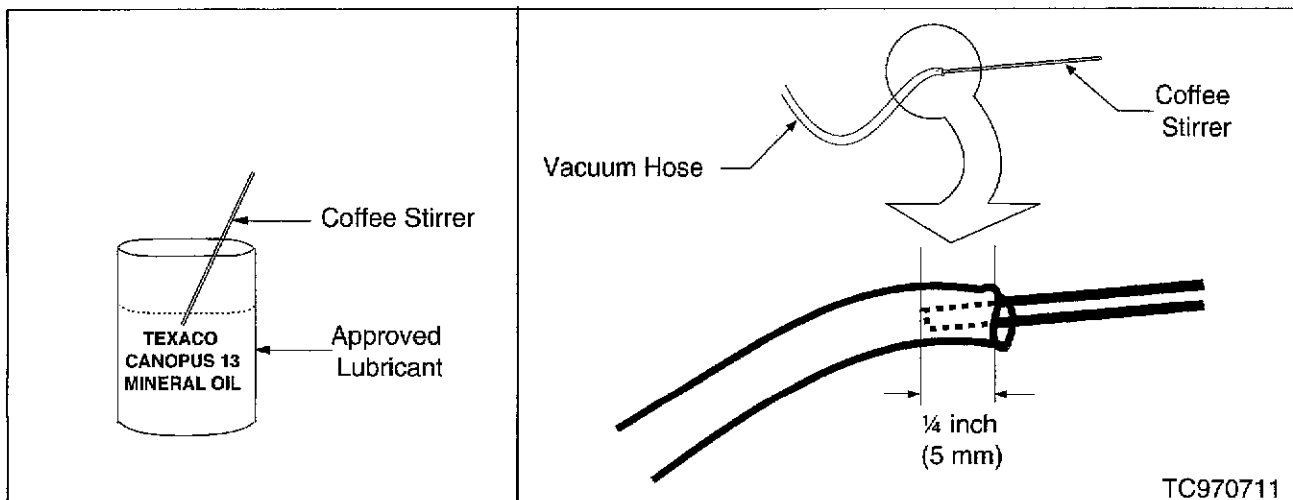


Figure 1

CAUTION: Apply mineral oil to vacuum hose only; do not get oil on the component.

057050

PARTS INFORMATION

A bottle of the Texaco Canopus Mineral Oil has already been sent to each dealer. If necessary, order additional bottles from **Kem Krest** using the following part number:

DESCRIPTION	PART NUMBER	QUANTITY
Texaco Canopus Mineral Oil	999MP-AJ000	1

CLAIMS INFORMATION

Do not submit a claim for this oil. The purchase of Nissan approved mineral oil is the responsibility of the dealer and is not covered by warranty.